





Result: **546.1** (519)
 Series: 90.6 90.1 92.0 96.0 85.5 91.9
 Shot value: 16 18 18 6 1 1 0 0 0 0
 Inner ten: 14
 Furthest: 1439 (6), 1113 (50), 864 (30)
 Best divider 27.3 (9.) 63.5 (31.) 65.0 (15.)
 Shot position 0.10 mm Left, 0.09 mm Low
 Dispersion value 3.83, Horizontal: 4.15, Vertical: 3.48

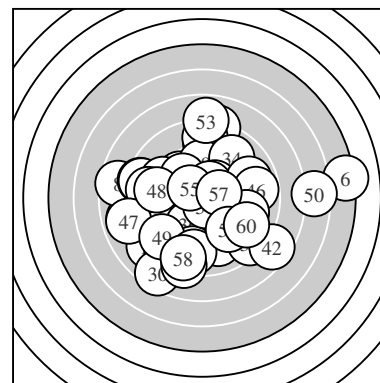


Series 1:
 9.2 ← 7.9 ← 10.1 ↗ 10.6 * 10.4 *
 5.2 → 10.4 * 7.6 ← 10.8 * 8.4 ←
 Best divider 27.3 (9.) 88.1 (4.) 127.1 (7.)
 Shot position 0.82 mm Left, 0.48 mm High
 Dispersion value 4.68, Horizontal: 6.49, Vertical: 1.31




Series 2:
 8.1 ↖ 10.0 ↗ 9.2 ↗ 8.1 ↑ 10.7 *
 9.7 ↘ 8.8 ↑ 8.1 ↑ 8.4 ← 9.0 ↓
 Best divider 65.0 (15.) 248.7 (12.) 324.7 (16.)
 Shot position 0.36 mm Left, 1.87 mm High
 Dispersion value 3.67, Horizontal: 3.09, Vertical: 4.17




Series 3:
 9.1 ↗ 9.5 ↖ 8.5 ↑ 8.5 ↘ 9.5 →
 9.2 ↖ 10.3 * 10.3 * 9.6 ↑ 7.5 ↘
 Best divider 160.6 (27.) 174.6 (28.) 350.0 (29.)
 Shot position 0.84 mm Left, 0.51 mm High
 Dispersion value 3.54, Horizontal: 2.82, Vertical: 4.13



Series 4:
 10.7 * 9.4 ↓ 9.0 ← 9.0 ↗ 9.2 ↓
 9.8 ↘ 10.5 * 8.4 ↘ 10.2 * 9.8 ↘
 Best divider 63.5 (31.) 120.5 (37.) 195.7 (39.)
 Shot position 0.09 mm Left, 0.78 mm Low
 Dispersion value 2.82, Horizontal: 2.67, Vertical: 2.95



Series 5:
 8.8 ← 7.6 ↘ 10.3 * 8.9 → 8.9 ↓
 8.8 → 7.9 ← 9.1 ← 8.7 ↘ 6.5 →
 Best divider 158.3 (43.) 456.0 (48.) 501.1 (44.)
 Shot position 0.67 mm Right, 0.99 mm Low
 Dispersion value 4.74, Horizontal: 6.11, Vertical: 2.73



Series 6:
 8.8 ↓ 9.1 → 7.9 ↑ 10.6 * 10.3 *
 8.2 ↓ 10.3 * 8.5 ↓ 9.3 ↘ 8.9 ↘
 Best divider 84.5 (54.) 154.0 (55.) 175.5 (57.)
 Shot position 0.81 mm Right, 1.68 mm Low
 Dispersion value 3.43, Horizontal: 2.38, Vertical: 4.23

Meyton Elektronik

ISSF AR Men – Competition – S2

Firing point no: 24

NEIRINCK, Hubert #304

StartNr: 345

3. November 2019 9:58

087 / W–VI.

signature of shooter

Meyton Elektronik